

Atty. Docket No.: 025821.P028

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In Re the application of:

Steve W.L. Yeung, Richard C.H. Lee

Serial No.: 09/678,058

Assigned Filing Date: October 2, 2000

For: AN EFFICIENT LIQUID CRYSTAL DISPLAY DRIVING SCHEME USING
ORTHOGONAL BLOCK - CIRCULANT MATRIX

RECEIVED
APR - 2 2001
TECHNOLOGY CENTER 2800

PRIORITY DOCUMENT SUBMITTAL

Hon. Commissioner of
Patents and Trademarks
Washington, D.C. 20231

RECEIVED
APR 24 2001
Technology Center 2600

Dear Sir:

Submitted herewith is a document upon which Applicant respectfully requests a convention priority for the above-captioned application, namely United Kingdom Patent Application No. 99 23292.8 filed October 1, 1999.

Respectfully submitted,

BLAKELY, SOKOLOFF, TAYLOR & ZAFMAN

Dated: 3/23/01

By: Eric S. Hyman


Eric S. Hyman, Reg. No. 30,139

CERTIFICATE OF MAILING

I hereby certify that this correspondence is being deposited with the United States Postal Service as first class mail in an envelope addressed to:
Assistant Commissioner for Patents, Washington,
D.C. 20231 on 3-26-01

Melissa Stead 3-26-01
Melissa Stead Date

12400 Wilshire Boulevard
Seventh Floor
Los Angeles, California 90025
(310) 207-3800



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

RECEIVED
APR 24 2001
Technology Center 2600

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.


In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed *M. Jenkins*
Dated 11 October 2000

CERTIFIED COPY OF
PRIORITY DOCUMENT
RECEIVED
APR 24 2001
TECHNOLOGY CENTER 2600

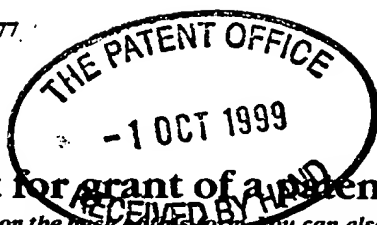

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road

Newport

Gwent NP9 1RH

1. Your reference

P15113

2. Patent application number

(The Patent Office will fill in this part)

01 OCT 1999

9923292.8

3. Full name, address and postcode of the or of each applicant (underline all surnames)

1) VARINTELLIGENT (BVI) LIMITED 6447940001
CRAIGMUIR CHAMBERS, P.O. BOX NO. 71,
ROAD TOWN, TORTOLA, BRITISH VIRGIN ISLANDS.

2) TERENCE LESLIE JOHNSON,
C/O EDWARD EVANS & CO., CHANCERY HOUSE,
53-64 CHANCERY LANE, LONDON WC2A 1SD
UNITED KINGDOM 43 9130002

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

1) BRITISH VIRGIN ISLANDS

4. Title of the invention

AN EFFICIENT LIQUID CRYSTAL DISPLAY
DRIVING SCHEME USING ORTHOGONAL
BLOCK-CIRCULANT MATRIX

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom
to which all correspondence should be sent
(including the postcode)

EDWARD EVANS & CO
CHANCERY HOUSE
53-64 CHANCERY LANE
LONDON WC2A 1SD

Patents ADP number (if you know it)

661001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

YES

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 10

Claim(s)

Abstract

Drawing(s)

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*)

Request for substantive examination (*Patents Form 10/77*)

Any other documents
(please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature  Date 1.10.1999

12. Name and daytime telephone number of person to contact in the United Kingdom

TERRY L. JOHNSON - 0171 405 4916

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

AN EFFICIENT LIQUID CRYSTAL DISPLAY DRIVING SCHEME USING ORTHOGONAL BLOCK-CIRCULANT MATRIX

1 Introduction

The present invention relates to a driving scheme of liquid crystal display, and more particularly to a special arrangement of the entries of the driving matrix, which results in an efficient implementation of the scheme and a reduction in hardware complexity.

Passive matrix driving scheme is commonly adopted for driving a liquid crystal display. For those high-mux displays with liquid crystals of fast response, the problem of loss of contrast due to frame response is severe. To cope with this problem, active addressing was proposed in which orthogonal matrix is used as the common driving signal. However, the method suffers from the problem of high computation and memory burden. Even worse, the difference in sequences of the rows of matrix results in different row signal frequencies. This may results in severe crosstalk problem. On the other hand, Multi-Line-Addressing (MLA) was proposed that makes a compromise between frame response, sequence, and computation problems. The block-diagonal driving matrix is made up of lower order orthogonal matrices. To further suppress the frame response, column interchanges of the driving matrix were suggested in such a way the selections are evenly distributed among the frame. The complexity of the scheme is proportional to square of the order of the building matrix. Increase of order of scheme results in complexity increase in both time and spatial domains. The order increase asks for more logic hardware and voltage levels of the column signal.

In the present invention, a special arrangement of the entries of driving matrix is proposed. By imposing orthogonal block-circulant property to the building blocks of the row (common) driving waveform, the row signals can be made to differ by time shifts only. Each row can now be implemented as a shifted version of preceding rows by using shift registers. The complexity of the matrix driving scheme is greatly reduced and is linearly proportional to the order of the orthogonal block-circulant building block.

2 Liquid Crystal Driving Scheme Using Orthogonal Block-Circulant Matrix

The following shows an order-8 Hadamard matrix.

$$\begin{bmatrix} 1 & 1 & 1 & 1 & 1 & 1 & 1 & 1 \\ 1 & -1 & 1 & -1 & 1 & -1 & 1 & -1 \\ 1 & 1 & -1 & -1 & 1 & 1 & -1 & -1 \\ 1 & -1 & -1 & 1 & 1 & -1 & -1 & 1 \\ 1 & 1 & 1 & 1 & -1 & -1 & -1 & -1 \\ 1 & -1 & 1 & -1 & -1 & 1 & -1 & 1 \\ 1 & 1 & -1 & -1 & -1 & -1 & 1 & 1 \\ 1 & -1 & -1 & 1 & -1 & 1 & 1 & -1 \end{bmatrix}$$

As mentioned in previous section, because of the computation burden and sequency problem of using active driving, MLA was proposed. To implement an 8-way drive by using 4-line MLA, two order-4 Hadamard matrices are used as the diagonal building blocks of the 8x8 driving matrix. The resulting common driving matrix is as follows:

$$\begin{bmatrix} 1 & 1 & 1 & 1 & 0 & 0 & 0 & 0 \\ 1 & -1 & 1 & -1 & 0 & 0 & 0 & 0 \\ 1 & 1 & -1 & -1 & 0 & 0 & 0 & 0 \\ 1 & -1 & -1 & 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & 1 & 1 & 1 \\ 0 & 0 & 0 & 0 & 1 & -1 & 1 & -1 \\ 0 & 0 & 0 & 0 & 1 & 1 & -1 & -1 \\ 0 & 0 & 0 & 0 & 1 & -1 & -1 & 1 \end{bmatrix}$$

To minimize the sequency problem, Hirai [14] proposed another 4x4 orthogonal building block. The resulting row (common) driving matrix is as follows:

$$\begin{bmatrix} -1 & 1 & 1 & 1 & 0 & 0 & 0 & 0 \\ 1 & 1 & -1 & 1 & 0 & 0 & 0 & 0 \\ 1 & -1 & 1 & 1 & 0 & 0 & 0 & 0 \\ 1 & 1 & 1 & -1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & -1 & 1 & 1 & 1 \\ 0 & 0 & 0 & 0 & 1 & 1 & -1 & 1 \\ 0 & 0 & 0 & 0 & 1 & -1 & 1 & 1 \\ 0 & 0 & 0 & 0 & 1 & 1 & 1 & -1 \end{bmatrix}$$

Notice that a general m -way display will have a $m \times m$ block diagonal orthogonal driving matrix made up of $m/4$ (assuming that m is an integer multiple of 4) 4x4 building blocks. Note also that the actual voltage applied is not necessary ± 1 but a constant multiple of the value (i.e., $\pm k$). To further suppress the frame response, Hirai proposed column interchanges of the row (common) driving matrix in such a way that the selections are evenly distributed among the frame. Using the 8-way drive as example, the following row (common) driving matrix is resulted

$$\begin{bmatrix} -1 & 0 & 1 & 0 & 1 & 0 & 1 & 0 \\ 1 & 0 & 1 & 0 & -1 & 0 & 1 & 0 \\ 1 & 0 & -1 & 0 & 1 & 0 & 1 & 0 \\ 1 & 0 & 1 & 0 & 1 & 0 & -1 & 0 \\ 0 & -1 & 0 & 1 & 0 & 1 & 0 & 1 \\ 0 & 1 & 0 & 1 & 0 & -1 & 0 & 1 \\ 0 & 1 & 0 & -1 & 0 & 1 & 0 & 1 \end{bmatrix}$$

In this invention, we propose a method of generating orthogonal block-circulant building blocks that result in reduced hardware complexity of the driving circuitry. First of all, we define orthogonal block-circulant matrix as follows:

Definition: An $NM \times NM$ block-circulant matrix B consisting of N $M \times M$ building blocks A_1, A_2, \dots, A_N is of the form

$$B = \begin{bmatrix} A_1 & A_2 & \Lambda & A_N \\ A_N & A_1 & \Lambda & A_{N-1} \\ M & M & O & M \\ A_2 & A_3 & A_N & A_1 \end{bmatrix}$$

It is said to be orthogonal block-circulant if $B^T B = B B^T = (NM)I_{NM}$.

For example, the following 4x4 matrix is orthogonal block-circulant

In this case, N can be 2 or 4. If $N=2$, then each A_j is 2x2 matrix. If $N=4$, then each A_j is

$$\begin{bmatrix} -1 & 1 & 1 & 1 \\ 1 & -1 & 1 & 1 \\ 1 & 1 & -1 & 1 \\ 1 & 1 & 1 & -1 \end{bmatrix}$$

a scalar (1 or -1). The orthogonal block-circulant matrix can be used as the diagonal building block of a row (common) driving matrix. By proper column and row interchanges, the resulting driving matrix has a property that each row is a shifted version of preceding rows and can be implemented by using shift registers. The following shows the resulting 8-way drive using 4x4 orthogonal block-circulant matrix after suitable row and column interchanges.

$$\begin{bmatrix} -1 & 0 & 1 & 0 & 1 & 0 & 1 & 0 \\ 0 & -1 & 0 & 1 & 0 & 1 & 0 & 1 \\ 1 & 0 & -1 & 0 & 1 & 0 & 1 & 0 \\ 0 & 1 & 0 & -1 & 0 & 1 & 0 & 1 \\ 1 & 0 & 1 & 0 & -1 & 0 & 1 & 0 \\ 0 & 1 & 0 & 1 & 0 & -1 & 0 & 1 \\ 1 & 0 & 1 & 0 & 1 & 0 & -1 & 0 \\ 0 & 1 & 0 & 1 & 0 & 1 & 0 & -1 \end{bmatrix}$$

For higher order B , the choice of the order of sub-block A_j is limited. Some M might result in nonexistence of orthogonal block-circulant B . Let $MN=6$, then M , the order of sub-block, can be 1, 2, or 3. It can be shown that orthogonal block-circulant B can be achieved by $M=2, 3$, but not $M=1$. In general, given that MN is even, it can be shown that orthogonal block-circulant B always exists provided that $M \neq 1$. In the following, two means of generating orthogonal block-circulant matrices are proposed.

The first method is based on theory of *paraunitary* matrix but it by no means generates all orthogonal block-circulant matrices. The second method is a means to identify orthogonal block-circulant matrices by nonlinear programming. Theoretically, it can be used to generate all orthogonal block-circulant matrices.

3 Generation of Orthogonal Block-Circulant Matrix Using Paraunitary Matrix

Consider order $M \times NM$ sub-matrix of B as follows:

$$E = [A_1 \quad A_2 \quad K \quad A_N]$$

Define $n \times n$ shift matrix $S_{n,m}$ as follows

$$S_{n,m} = \begin{bmatrix} 0 & I_{m \times m} \\ 0_{(n-m) \times (n-m)} & 0 \end{bmatrix}$$

A paraunitary matrix E of order $M \times NM$ satisfies

(i) E is orthogonal. i.e.,

$$EE^T = I$$

(ii) E is orthogonal to its column shift by multiples of M . i.e.,

$$ES_{NM, iM}E^T = 0$$

for $i = 1, 2, \dots, N-1$.

In general, paraunitary matrices can be represented in a cascade lattice form with rotational angles as parameters. Yeung et al. proposed a new LCD driving scheme based on paraunitary matrices (refer to [16] for details). The following are two example 2×4 paraunitary matrices.

$$E_1 = \begin{bmatrix} 1 & 1 & -1 & 1 \\ -1 & -1 & -1 & 1 \end{bmatrix}$$

$$E_2 = \begin{bmatrix} -1 & 1 & 1 & 1 \\ 1 & -1 & 1 & 1 \end{bmatrix}$$

We have the following property of paraunitary matrices:

Property: B generated by block-circulating paraunitary E is orthogonal.

Proof: Define $n \times n$ recurrent shift matrix $R_{n,m}$ as follows

An *orthogonal block-circulant* matrix B of order $NM \times NM$ with $M \times NM$ sub-matrix E satisfies

(i) E is orthogonal. i.e.,

$$EE^T = I$$

(ii) E is orthogonal to its recurrent shift by multiples of M . i.e.,

$$ER_{NM, iM} E^T = 0$$

for $i = 1, 2, \dots, N-1$.

Provided that E is paraunitary, as

$$R_{n,m} = S_{n,m} + S_{n-m, n-m}^T$$

we have

$$ER_{(N+1)M, iM} E^T = E(S_{n,m} + S_{n-m, n-m}^T)E^T = ES_{n,m}E^T + ES_{n-m, n-m}^T E^T = 0$$

and that completes the proof. Notice that E is paraunitary is a sufficient but not necessary condition for B to be orthogonal block-circulant. Using E_1 and E_2 as building blocks, we obtain the following orthogonal block-circulant matrices.

$$B_1 = \begin{bmatrix} 1 & 1 & -1 & 1 \\ -1 & -1 & -1 & 1 \\ -1 & 1 & 1 & 1 \\ -1 & 1 & -1 & -1 \end{bmatrix}$$

$$B_2 = \begin{bmatrix} -1 & 1 & 1 & 1 \\ 1 & -1 & 1 & 1 \\ 1 & 1 & -1 & 1 \\ 1 & 1 & 1 & -1 \end{bmatrix}$$

Notice that B_2 is orthogonal circulant as well as orthogonal block-circulant. As illustrated before, by using it as the building block of row (common) driving matrix with suitable row and column interchanges, each row is a delay-1 shifted version of preceding row. However, B_1 is orthogonal block-circulant but it is not circulant. By suitable row and column interchanges of the resulting driving matrix, two sets of row (common) driving waveforms are obtained. Within a set, each row is a shifted version of the others. We observe that the complexity of implementation is proportional to the order of the sub-blocks A_j (i.e., M). For $NM=4$, we observe that M can be 1 or 2. For higher order, $M=1$ does not result in any circulant B that is orthogonal. Provided $M=2$, orthogonal block-circulant B always exists and can be generated by $2 \times 2N$ paraunitary matrices. The driving matrix resulted from B_2 with suitable column interchanges is

shown below:

$$\begin{bmatrix} 1 & 0 & 1 & 0 & -1 & 0 & 1 & 0 \\ -1 & 0 & -1 & 0 & -1 & 0 & 1 & 0 \\ -1 & 0 & 1 & 0 & 1 & 0 & 1 & 0 \\ -1 & 0 & 1 & 0 & -1 & 0 & -1 & 0 \\ 0 & 1 & 0 & 1 & 0 & -1 & 0 & 1 \\ 0 & -1 & 0 & -1 & 0 & -1 & 0 & 1 \\ 0 & -1 & 0 & 1 & 0 & 1 & 0 & 1 \\ 0 & -1 & 0 & 1 & 0 & -1 & 0 & -1 \end{bmatrix}$$

Rows 1, 3, 5, 7 and 2, 4, 6, 8 form the two sets within which each row is a shifted version of the others.

4 Generation of Orthogonal block-circulant Matrix by Nonlinear Programming

We might also generate orthogonal block-circulant matrix by nonlinear programming. We use the method of steepest descent to illustrate the idea. The method of steepest descent is widely used in the identification of complex and nonlinear systems. The update law in identifying sub-matrix E can be stated as follows:

$$E_{n+1} = E_n + \delta \frac{\partial P}{\partial E}$$

where δ is the step size. P is the cost or penalty function. We set P as follows:

$$P(E) = \sum_{i,j} (e_{ij}^2 - 1)^2 + \|EE^T - I\|_F^2 + \sum_i \|ER_{NM,iM} E^T\|_F^2$$

e_{ij} are the entries of E . $\| \cdot \|_F$ is the Frobenius norm of a matrix. The first summation in the function forces all the entries of E to be ± 1 . The second one forces E to be orthogonal, while the third summation ensures orthogonal block-circulant property of the resulting B .

5 List of Order-4 and Order-8 Orthogonal Block-Circulant Matrices

The following is an exhaustion of all 2x4 and 2x8 sub-matrices E with entries ± 1 that result in orthogonal block-circulant building block.

5.1 Order-4

(1)

$$\begin{bmatrix} 1 & 1 & -1 & 1 \\ 1 & 1 & 1 & -1 \end{bmatrix}$$

(2)

$$\begin{bmatrix} -1 & 1 & 1 & 1 \\ 1 & 1 & 1 & -1 \end{bmatrix};$$

(3)

$$\begin{bmatrix} -1 & 1 & -1 & -1 \\ 1 & 1 & -1 & 1 \end{bmatrix};$$

(4)

$$\begin{bmatrix} -1 & -1 & -1 & 1 \\ 1 & 1 & -1 & 1 \end{bmatrix};$$

(5) all alternatives of (1)-(4) generated by

- (i) sign inversion (i.e., $-E$);
- (ii) row interchange, i.e.,

$$\begin{bmatrix} 0 & 1 \\ 1 & 0 \end{bmatrix} E,$$

- (iii) circulant shift of E , i.e.,

$$ER_{4,2}$$

and any combinations of (i)-(iii).

5.2 Order-8

(1)

$$\begin{bmatrix} 1 & 1 & -1 & 1 & 1 & -1 & 1 & 1 \\ 1 & 1 & 1 & -1 & 1 & -1 & -1 & -1 \end{bmatrix};$$

(2)

$$\begin{bmatrix} 1 & 1 & 1 & -1 & 1 & -1 & -1 & -1 \\ 1 & 1 & 1 & -1 & 1 & -1 & -1 & -1 \\ 1 & 1 & 1 & 1 & -1 & 1 & 1 & -1 \end{bmatrix};$$

(3)

(4)

(5)

(6)

$$\begin{bmatrix} 1 & 1 & -1 & 1 & -1 & 1 & -1 & -1 \\ 1 & 1 & 1 & -1 & 1 & 1 & -1 & -1 \\ 1 & 1 & 1 & 1 & -1 & 1 & 1 & -1 \\ 1 & 1 & 1 & 1 & -1 & 1 & 1 & -1 \\ 1 & 1 & 1 & 1 & -1 & 1 & 1 & -1 \\ 1 & 1 & 1 & 1 & -1 & 1 & 1 & -1 \\ 1 & 1 & 1 & 1 & -1 & 1 & 1 & -1 \\ 1 & 1 & 1 & 1 & -1 & 1 & 1 & -1 \end{bmatrix};$$

(7)

(8)

$$\begin{bmatrix} -1 & 1 & 1 & -1 & 1 & -1 & 1 & -1 \\ 1 & 1 & 1 & 1 & 1 & 1 & -1 & -1 \end{bmatrix};$$

(9)

$$\begin{bmatrix} -1 & 1 & 1 & 1 & 1 & 1 & 1 & -1 \\ 1 & 1 & -1 & 1 & -1 & 1 & -1 & -1 \end{bmatrix};$$

(10)

$$\begin{bmatrix} -1 & 1 & -1 & 1 & -1 & 1 & 1 & -1 \\ 1 & 1 & -1 & -1 & -1 & -1 & -1 & -1 \end{bmatrix};$$

(11)

$$\begin{bmatrix} -1 & 1 & 1 & -1 & -1 & -1 & -1 & -1 \\ 1 & 1 & -1 & 1 & -1 & 1 & -1 & -1 \end{bmatrix};$$

(12)

$$\begin{bmatrix} 1 & -1 & -1 & 1 & -1 & 1 & -1 & 1 \\ 1 & 1 & 1 & 1 & 1 & 1 & -1 & -1 \end{bmatrix};$$

(13)

$$\begin{bmatrix} 1 & -1 & -1 & 1 & 1 & -1 & 1 & -1 \\ 1 & 1 & 1 & 1 & 1 & 1 & -1 & -1 \end{bmatrix};$$

(14)

$$\begin{bmatrix} 1 & -1 & 1 & -1 & 1 & -1 & -1 & 1 \\ 1 & 1 & 1 & 1 & 1 & 1 & -1 & -1 \end{bmatrix};$$

(15)

$$\begin{bmatrix} 1 & -1 & -1 & 1 & -1 & -1 & -1 & -1 \\ 1 & 1 & 1 & -1 & 1 & -1 & -1 & -1 \end{bmatrix};$$

(16)

$$\begin{bmatrix} 1 & -1 & 1 & -1 & 1 & 1 & -1 & -1 \\ 1 & 1 & 1 & 1 & 1 & -1 & -1 & 1 \end{bmatrix};$$

(17)

$$\begin{bmatrix} 1 & -1 & 1 & 1 & 1 & 1 & -1 & 1 \\ 1 & 1 & 1 & -1 & 1 & -1 & -1 & -1 \end{bmatrix};$$

(18)

$$\begin{bmatrix} 1 & 1 & -1 & 1 & 1 & 1 & 1 & -1 \\ -1 & 1 & 1 & 1 & -1 & 1 & -1 & -1 \end{bmatrix};$$

(19)

$$\begin{bmatrix} 1 & 1 & 1 & -1 & 1 & 1 & -1 & 1 \\ -1 & 1 & 1 & 1 & -1 & 1 & -1 & -1 \end{bmatrix};$$

(20)

$$\begin{bmatrix} 1 & 1 & -1 & 1 & 1 & 1 & 1 & -1 \\ 1 & -1 & 1 & 1 & 1 & -1 & -1 & -1 \end{bmatrix};$$

(21)

(22)

(23)

(24)

$$\begin{bmatrix} -1 & 1 & 1 & 1 & 1 & -1 & 1 & 1 \\ -1 & 1 & 1 & 1 & 1 & -1 & 1 & 1 \\ -1 & 1 & 1 & 1 & 1 & -1 & 1 & 1 \\ -1 & 1 & 1 & 1 & 1 & -1 & 1 & 1 \\ -1 & 1 & 1 & 1 & 1 & -1 & 1 & 1 \\ -1 & 1 & 1 & 1 & 1 & -1 & 1 & 1 \\ -1 & 1 & 1 & 1 & 1 & -1 & 1 & 1 \\ -1 & 1 & 1 & 1 & 1 & -1 & 1 & 1 \end{bmatrix}$$

(25)

(26)

(27)

$$\begin{bmatrix} 1 & -1 & 1 & -1 & 1 & -1 & 1 & -1 \\ -1 & 1 & -1 & 1 & -1 & 1 & -1 & 1 \end{bmatrix}$$

(28) all alternatives of (1)-(27) generated by

- (i) sign inversion (i.e., $-E$);
- (ii) row interchange, i.e.,

$$\begin{bmatrix} 0 & 1 \\ 1 & 0 \end{bmatrix} E;$$

- (iii) circulant shift of E , i.e.,

$$ER_{8,2i}$$

$i=1, 2$, or 3 , and any combinations of (i)-(iii)

SUMMARY OF INVENTION

- (1) A protocol for driving a liquid crystal display within which the row (common) driving matrix is made up of orthogonal block-circulant matrices.
- (2) Following on from (1), the protocol for a liquid crystal display results from row and column interchanges of the row (common) driving matrix mentioned in (1).
- (3) Following on from (1), the row (common) driving matrix can be an orthogonal block-circulant matrix.
- (4) Following on from (1), the row (common) driving matrix can be a block diagonal matrix wherein all the building blocks are orthogonal block-circulant.

- (5) Following on from (2) and/or (4), the row (common) driving matrix can be row and column interchanged version of the row (common) driving matrix mentioned in (4).
- (6) In particular, there is provided a driving protocol such that the row (common) driving matrix is based on orthogonal block-circulant building blocks generated by method stated in Section 3.
- (7) In particular, there is provided a driving protocol such that the row (common) driving matrix is based on orthogonal block-circulant building blocks generated by method stated in Section 4.
- (8) In particular, there is provided a driving protocol such that the row (common) driving matrix is based on order-4 and 8 orthogonal block-circulant building blocks generated by sub-matrices stated in Section 5.1 and 5.2

References

- [1] US Patent No. 5,420,604
- [2] US Patent No. 5,677,705
- [3] US Patent No. 5,805,130
- [4] US Patent No. 5,682,177
- [5] US Patent No. 5,677,705
- [6] US Patent No. 5,485,173
- [7] T. J. Scheffer and B. Clifton, "Active Addressing Method for High-Contrast Video-Rate STN Displays," *Proceedings SID 92*.
- [8] B. Clifton et al., "Optimum Row Functions and Algorithms for Active Addressing," *Proceedings SID 93*.
- [9] B. Clifton and D. Prince, "Hardware Architectures for Video-Rate, Active Addressed STN Displays," *Proceedings Japan Display 92*.
- [10] T. N. Ruckmongathan et al., "A New Addressing Techniques for Fast Responding STN LCDs," *Proceedings Japan Display 92*.
- [11] T. N. Ruckmongathan, "Addressing Techniques for RMS Responding LCDs - A Review," *Proceedings Japan Display 92*.
- [12] T. Otani et al., "Investigation of the Active Drive Method for STN-LCDs," *Proceedings SID95*.
- [13] Y. Hirari et al., "STN-LCDs Enhanced by Multiple Line Addressing (MLA): Present and Future Applications," *Proceedings SID 97*.
- [14] Y. Hirari et al., "An Improved Architecture of the Multiple Line Addressed (MLA) LCD," *Proceedings Asia Display 95*.
- [15] Y. Kudo et al., "A Two-line Simultaneous Selection Method for Fast-Response STN-LCDs," *Proceedings Asia Display 95*.
- [16] Steve Yeung et al., "A New Driving Scheme for Liquid Crystal Displays," *Patent Pending*.